

Drinking Water Engineering and Science Discussions is the access reviewed discussion forum of *Drinking Water Engineering and Science*

**Development of a
predictive model**

D. J. de Ridder et al.

Development of a predictive model to determine micropollutant removal using granular activated carbon

D. J. de Ridder¹, M. McConville¹, A. R. D. Verliefde^{1,2,4}, L. T. J. van der Aa^{1,3}, S. G. J. Heijman¹, J. Q. J. C. Verberk¹, L. C. Rietveld¹, and J. C. van Dijk¹

¹Delft University of Technology, P.O. Box 5048, 2600 GA Delft, The Netherlands

²UNESCO Centre for Membrane Science & Technology, University of New South Wales, NSW 2052, Sydney, Australia

³Waternet, P.O. Box 94370, 1090 GJ, Amsterdam, The Netherlands

⁴KWR Watercycle Research Institute, P.O. Box 1072, 3430BB Nieuwegein, The Netherlands

Received: 5 August 2009 – Accepted: 12 August 2009 – Published: 13 October 2009

Correspondence to: D. J. de Ridder (d.j.deridder@tudelft.nl)

Published by Copernicus Publications on behalf of the Delft University of Technology.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

The occurrence of organic micropollutants in drinking water and its sources has opened up a field of study related to monitoring concentration levels in water sources, evaluating their toxicity and estimating their removal in drinking water treatment processes.

5 Because a large number of organic micropollutants is currently present (although in relatively low concentrations) in drinking water sources, a method should be developed to select which micropollutants has to be evaluated with priority. In this paper, a screening model is presented that can predict solute removal by activated carbon, in ultrapure water and in natural water. Solute removal prediction is based on a combination of
10 solute hydrophobicity (expressed as $\log D$, the pH corrected $\log K_{ow}$), solute charge and the carbon dose. Solute molecular weight was also considered as model input parameter, but this solute property appeared to relate insufficiently to solute removal.

Removal of negatively charged solutes by preloaded activated carbon was reduced while the removal of positively charged solutes was increased, compared with freshly regenerated activated carbon. Differences in charged solute removal by freshly regenerated activated carbon were small, indicating that charge interactions are an important
15 mechanism in adsorption onto preloaded carbon. The predicted solute removal was within 20 removal-% deviation of experimentally measured values.

1 Introduction

20 Pesticides and industrial waste chemicals were detected in drinking water sources in the eighties (Cotruvo, 1985). Nowadays, trace concentrations of pharmaceuticals and personal care products have been found in water sources as well. Their toxicological relevance and removal in water treatment processes is currently being assessed (Jones, 2001; Snyder, 2008; Westerhoff, 2005). Organic micropollutants cover a huge
25 array of solutes (Schwartzbach, 2006), but only a limited selection of specific solutes can be experimentally investigated due to time and financial constraints. Selection cri-

Development of a predictive model

D. J. de Ridder et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



teria can be based on one or more of the following criteria (Verliefde, 2007):

- solute concentration level is high in drinking water sources;
- the solute poses a risk to human health;
- the solute has low removal in current drinking water treatment processes.

5 Health effects can be assessed by models that relate specific molecular properties to a projected toxicological endpoint, such as carcinogenicity or mutagenicity. These kind of models are referred to as Quantitative Structure Activity Relationship (QSAR) models, and are currently in use by environmental protection agencies (US EPA, Danish EPA) and in the European Union, in order to develop legislation related to water quality
10 (Cronin et al., 2003).

No use of QSAR-models which predict solute removal in drinking water treatment has been reported, although some have been proposed for membrane filtration (Verliefde, 2009; Yangali-Quintanilla, 2008), ozonation (Lei, 2007) and activated carbon filtration (Crittenden, 1999; Luehrs, 1996; Blum, 1994; Brasquet, 1997).

15 In this article, equilibrium removal data of 21 pharmaceuticals is presented. Their removal is predicted with a QSAR model for several process conditions: in ultrapure and surface water, and on both freshly regenerated and preloaded activated carbon.

2 Materials and methods

The pharmaceuticals were of analytical grade, and were obtained from Sigma-Aldrich.
20 The selection of the pharmaceuticals was based on molecular weight (MW), charge (pKa) and hydrophobicity (log D) (see Table 1).

The pKa is the pH value at which 50% of the solutes are dissociated or protonated. Within 2 pH units from the pKa, full dissociation of protonation is accomplished. For this reason, log D was set at a constant value for $|\text{pH}-\text{pKa}|>2$. For the same reason, solute
25 pKa values were not used directly as model parameter, but a constant has been used

Development of a predictive model

D. J. de Ridder et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



with a value of -1 for negatively charged solutes, $+1$ for positively charged solutes, and 0 for neutral solutes.

Log D is a pH-dependent octanol water partition (K_{ow}) and is relevant for solutes that are (partly) dissociated or protonated. It can be calculated using Eqs. (1) and (2).

5 Acids (negatively charged) : $\log D = \log K_{ow} - \log(1 + 10^{(pH-pK_a)})$ (1)

Bases (positively charged) : $\log D = \log K_{ow} - \log(1 + 10^{(pK_a-pH)})$ (2)

10 Three water types were used in the experiments: ultrapure water, surface water and wastewater effluent. Both surface water and wastewater samples came from treatment locations of Waternet, the watercycle company for Amsterdam and its surrounding areas.

15 The surface water originated from Weesperkarspel water treatment plant, after coagulation, filtration, ozonation and pellet softening pretreatment. It had an initial pH value of 8. The wastewater originated from WWTP Horstermeer after primary sedimentation, activated sludge and secondary sedimentation and had an pH value of 6.5. Ultrapure water was produced from tap water, using activated carbon filtration, ion exchange and reverse osmosis. This water had a pH value of 4.

20 The activated carbon used in the experiments was Norit GAC 830 P. Both freshly regenerated carbon and preloaded carbon were used. The preloaded carbon was collected from the full scale carbon filters at Weesperkarspel after a runtime of >6 months. The characteristics of fresh GAC 830 P are given in Table 2. Before use, all carbon was sieved and the fraction 0.63–0.71 mm was collected. Fine particles were separated and removed from the carbon using sedimentation in ultrapure water. Finally, the carbon was dried at 105°C for 24 h. Bottles, covers and stirring bars were rinsed three

25 Equilibrium removal was determined using adsorption isotherms. For each adsorption isotherm, seven bottles were prepared containing 20, 50, 100, 200, 500, 1000 and 2000 mg of carbon. Ultrapure water was added and air trapped within the carbon pores

Development of a predictive model

D. J. de Ridder et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



was removed by boiling the samples for 2 min. The remaining amount of water was determined by weight. Finally 2.25 litres of sample water was added to each bottle and the stock solution of pharmaceuticals was dosed, aiming at an initial concentration of 2 µg/L for all pharmaceuticals. The experiments were carried out in a climatized room at 12°C. Batch samples were continuously stirred using a Labinco LD-746 magnetic stirrer at 84 rpm. This was the maximum rotation frequency at which carbon grains were still immobile, to prevent scouring of the grains. Samples were analyzed after 8 weeks.

When the samples were collected for analysis, they were filtered through a 0.45 micron cellulose acetate filter before they were analyzed at Technologiezentrum Wasser (TZW, Germany) using LC/MS/MS with SDB as solid phase eluent.

3 Results and discussion

3.1 Results equilibrium experiments

In ultrapure water, most solutes were removed >95%, even at carbon doses of 50 mg (see Fig. 1). In surface water and wastewater, >95% removal was achieved at carbon doses of 200 mg and 1000 mg, respectively.

The solutes are ordered by increasing removal for each of the charge groups (negatively charged, neutral, positively charged). Figure 1 shows that in ultrapure water, removal of negatively charged solutes was reduced in the presence of a NOM preloading layer, while the removal of positively charged solutes increased. This difference can be explained by charge interactions. Ultrapure water had a pH of 4, and at this pH value, fresh activated carbon has a positive surface charge (Bjelopavlic et al., 1999), which results in repulsion of positively charged solutes and attraction of negatively charged solutes. NOM, on the other hand, is negatively charged at this pH value. The presence of a NOM preloading layer can enhance removal of positively charged solutes and reduce removal of negatively charged solutes due to charge interactions.

Removal of all 21 solutes was reduced in surface water, as a result of increased

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



competition with NOM present in the water for adsorption sites.

In wastewater, a high removal of five negatively charged solutes was observed in the blank sample, where no carbon was dosed. Consequently, their removal by activated carbon adsorption cannot be determined. This may indicate biological removal or adsorption onto suspended solids in the water phase. This last mechanism is unlikely; fenoprofen, diclofenac and gemfibrozil were not removed in the blank solution, while their log D values were similar to the other negatively charged solutes. Because of the limited amount of data left on removal of negatively charged solutes in wastewater, no further attempt has been made to construct a QSAR model to predict solute removal in this water matrix.

In order to estimate the influence of molecular weight and log D on solute removal, the correlation between solute equilibrium removal and each of these solute properties was investigated. The following was observed.

- At higher log D values, removal increased for solutes with similar charge. This can be related to increased hydrophobic partitioning due to lower water affinity.
- At similar log D values, positively charged solute are removed more efficiently than negatively charged solutes. On fresh carbon, these differences were relatively small. On preloaded carbon, however, neutral solutes show similar removal as negatively charged solutes, and positively charged solutes show 20–40% higher removal. This indicated that charge attraction/repulsion is an important removal mechanism on preloaded carbon, and that the higher log D values of negatively charged solutes compensate charge repulsion enough to show similar removal as neutral solutes.
- MW showed poor correlation with solute removal. This can be related to the limited variation in MW in the solutes used, which varied between 200 and 300 g/mol for most solutes. At similar MW, size exclusion effects will be similar and similar solute removal is expected based on MW alone. As such, MW cannot be used to explain differences in solute removal.

Development of a predictive model

D. J. de Ridder et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.2 QSAR development

To predict solute equilibrium removal, a multivariable linear regression (MLR) model was developed. Different models were developed for each water type, using solute properties and carbon mass as input parameters to predict solute removal percentage.

5 Other authors observed that this removal percentage is independent of initial solute concentration at trace concentrations (Westerhoff, 2005; Matsui, 2003).

The parameters log D and carbon concentration (carbon mass/sample volume) were used directly as input variables in the model. Carbon concentration did not have a linear relationship with solute removal. In order to linearize this relationship, the log
10 carbon concentration was used. It has to be remarked that this linearized relationship is theoretically still not linear, but the data-entries are approximated well ($R^2 > 0.82$).

In the model development, 17 solutes were used, while sotalol, propranolol, gemfibrozil and cyclophosphamide were reserved for model validation. The latter solutes were selected for model validation, as they represent the different charge groups and
15 their log Kow values also vary.

3.3 Model calibration and validation

Individual models were constructed for ultrapure water and surface water, with either freshly regenerated or preloaded activated carbon. The model for solute removal on fresh carbon in ultrapure water was based on a smaller dataset ($n=30$). As solutes
20 were rapidly removed in this experimental condition, specific removal data was only available at lower carbon concentrations.

DWESD

2, 189–204, 2009

Development of a predictive model

D. J. de Ridder et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The following relations were found for each water type:

Ultrapure water fresh carbon ($N = 30$)

$$C_e/C_0 = -0.018 \cdot \log D - 0.011 \cdot \text{charge} - 0.327 \cdot \log (\text{carbon concentration}) + 0.513$$

Ultrapure water preloaded carbon ($N = 39$)

$$C_e/C_0 = -0.061 \cdot \log D - 0.216 \cdot \text{charge} - 0.249 \cdot \log (\text{carbon concentration}) + 0.516$$

Surface water preloaded carbon ($N = 62$)

$$C_e/C_0 = -0.047 \log D - 0.128 \cdot \text{charge} - 0.538 \cdot \log (\text{carbon concentration}) + 1.089$$

Solute removal increased at higher log D values and carbon concentrations. Negatively charged solutes are removed less effectively than positively charged solutes.

3.4 Model performance

Model acceptability can be determined using several criteria (Eriksson, 2003):

- dataset used to train the QSAR model contains at least 5 times more components than the amount of model variables used
- the dataset is representative (variable variation spans area of interest)
- the dataset is homogeneous (similar removal mechanisms)
- the model has “good performance”. This can be expressed as Q^2 . To determine the Q^2 , parallel models are constructed with random data entries excluded from the training set. Consequently, the model is used to predict the value of the excluded data set, and the R^2 found for this data entries is the Q^2 . A $Q^2 > 0.5$ is regarded as good and a $Q^2 > 0.9$ as excellent.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



– The model gives random over/under prediction.

According to the criteria of Eriksson, the amount of data is sufficient to construct a model (a minimum of 15 data entries is required for a 3-parameter model, which is easily achieved here). Solutes were selected to have a wide variety in solute parameters, each parameter representing a different removal mechanism (size exclusion, hydrophobic interaction, electrostatic attraction/repulsion). As a consequence, the dataset is representative, but cannot be homogeneous. All models have Q^2 values >0.5 , thus complying with the criteria for model internal validation.

Predicted and measured removal rates are compared in Fig. 2a and b, for the training set and the validation set, respectively. In all training sets, predicted solute removal is within 20% deviation from measured solute removal for most solutes. However, larger deviations occur when predicting low solute removal (0–35% measured removal), with overpredictions up to 40%. As the database used in model construction contains only a few solutes with removal $<35\%$, these solutes are not represented well when constructing the model using the least-squares fitting method, hence explaining the relatively large variations at low removal. The (external) validation set shows similar accuracy as the training set. Over/under prediction is random for the model for surface water and preloaded carbon, but for the two models for ultrapure water, the model typically under-predicts in the measured removal-% range $>80\%$.

4 Conclusions

Log D and solute charge are influential solute properties with respect to solute removal with activated carbon. Charge interaction was observed by positively charged and negatively charged solutes with the carbon surface. When the activated carbon was preloaded with NOM, the carbon surface charge became negative, resulting in repulsive interaction with negatively charged solutes, and attractive interaction with positively charged solutes. In this dataset, solute molecular weight was not correlated

Development of a predictive model

D. J. de Ridder et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



with solute removal.

Acknowledgements. This paper is based upon work supported by VEWIN, the association of drinking water companies in the Netherlands. Any opinions, findings, conclusions, or recommendations expressed in this publication are those of the authors and do not necessarily reflect the views of the supporting organization.

References

- Bjelopavlic, M., Newcombe, G., and Hayes, R.: Adsorption of NOM onto activated carbon: effect of surface charge, ionic strength, and pore volume distribution, *J. Colloid Interface Sci.*, 210, 271–280, 1999.
- Blum, D. J. W., Suffet, I. H., and Duguet, J. P.: Quantitative structure-activity relationship using molecular connectivity for the activated carbon adsorption of organic chemicals in water, *Water Res.*, 28, 687–699, 1994.
- Brasquet, C. and Le Cloirec, P.: Adsorption onto activated carbon fibers: application to water and air treatments, *Carbon*, 35, 1307–1313, 1997.
- Cotruvo, J. A.: Organic micropollutants in drinking water: an overview, *Sci. Total Environ.*, 47, 7–26, 1985.
- Crittenden, J. C., Sanonraj, S., Bulloch, J. L., Hand, D. W., Rogers, T. N., Speth, T. F., and Ulmer, M.: Correlation of aqueous-phase adsorption isotherms, *Environ. Sci. Technol.*, 33, 2926–2933, 1999.
- Cronin, M. T. D., Walker, J. D., Jaworska, J. S., Comber, M. H. I., Watts, C. D., and Worth, A. P.: Use of QSARs in international decision-making frameworks to predict ecologic effects and environmental fate of chemical substances, *Environ. Health Persp.*, 111, 1376–1390, 2003.
- Eriksson, L., Jaworska, J., Worth, A. P., Cronin, M. T. D., McDowell, R. M., and Gramatica, P.: Methods for reliability and uncertainty assessment and for applicability evaluations of classification- and regression-based QSARs, *Environ. Health Persp.*, 111, 1361–1375, 2003.
- Jones, O. A. H., Voulvoulis, N., and Lester, J. N.: Human pharmaceuticals in the aquatic environment: a review, *Environ. Technol.*, 22, 1383–1394, 2001.
- Lei, H. and Snyder, S. A.: 3D QSPR models for the removal of trace organic contaminants by ozone and free chlorine, *Water Res.*, 41, 4051–4060, 2007.

Development of a predictive model

D. J. de Ridder et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Development of a predictive model

D. J. de Ridder et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[I◀](#)[▶I](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

- Luehrs, D. C., Hickey, J. P., Nilsen, P. E., Godbole, K. A., and Rogers, T. N.: Linear solvation energy relationship of the limiting partition coefficient of organic solutes between water and activated carbon, *Environ. Sci. Technol.*, 30, 143–152, 1996.
- 5 Matsui, Y., Fukuda, Y., Inoue, T., and Matsushita, T.: Effect of natural organic matter on powdered activated carbon adsorption of trace contaminants: characteristics and mechanism of competitive adsorption, *Water Res.*, 37, 4413–4424, 2003.
- Schwartzenbach, R. P., Escher, B. I., Fenner, K., Hofstetter, T. B., Johnson, C. A., von Gunten, U., and Wehrli, B.: The challenge of micropollutants in aquatic systems, *Science*, 313, 1072–1077, 2006.
- 10 Snyder, S. A.: Occurrence, treatment and toxicological relevance of EDC's and pharmaceuticals in water, *Ozone Sci. Eng.*, 30, 65–69, 2008.
- Verliefde, A., Cornelissen, E., Amy, G., van der Bruggen, B., and van Dijk, H.: Priority organic micropollutants in water sources in Flanders and the Netherlands and assessment of removal possibilities with nanofiltration, *Environ. Pollut.*, 146, 281–289, 2007.
- 15 Verliefde, A. R. D., Cornelissen, E. R., Heijman, S. G. J., Hoek, E. M. V., Amy, G. L., van der Bruggen, B., and van Dijk, J. C.: Influence of solute-membrane affinity on rejection of uncharged organic solutes by nanofiltration membranes, *Environ. Sci. Technol.*, 43, 2400–2406, 2009.
- Westerhoff, P., Yoon, Y., Snyder, S., and Wert, E.: Fate of endocrine-disruptor, pharmaceutical, and personal care product chemicals during simulated drinking water treatment processes, *Environ. Sci. Technol.*, 39, 6649–4443, 2005.
- 20 Yangali-Quintanilla, V., Kim, T.-U., Kennedy, M., and Amy, G.: Modeling of RO/NF membrane rejections of PhACs and organic compounds: a statistical analysis, *Drink. Water Eng. Sci.*, 1, 7–15, 2008, <http://www.drink-water-eng-sci.net/1/7/2008/>.

Development of a predictive model

D. J. de Ridder et al.

Table 1. Selected compounds and their properties.

	Solute	pKa	MW (g/mol)	log Kow	Log D (pH 4)	Log D (pH 6.5)	Log D (pH 8)
Negatively Charged	Fenoprofen	4.21	242.27	3.9	3.69	1.9	1.9
	Clofibric acid	3.35	214.65	2.57	1.83	0.57	0.57
	Ibuprofen	4.47	206.29	3.97	3.84	1.97	1.97
	Ketoprofen	4.29	254.28	3.12	2.94	1.12	1.12
	Diclofenac	4.08	296.15	4.51	4.25	2.51	2.51
	Gemfibrozil	4.45	250.34	4.77	4.64	2.72	2.77
	Bezafibrate	3.44	361.82	4.25	3.58	2.25	2.25
	Naproxen	4.84	230.59	3.18	3.12	1.51	1.18
Neutral	Phenazon	0	188.23	0.38	0.4	0.4	0.4
	Cyclophosphamide	0	261.09	0.63	0.63	0.63	0.63
	Aminopyrine	0	231.3	1	1	1	1
	Carbamazepine	0	236.27	2.45	2.4	2.4	2.4
	Pentoxyfilline	0	278.31	0.29	0.29	0.29	0.29
Positively Charged	Terbutaline	8.86	225.29	0.9	-1.1	-1.1	-0.02
	Propranolol	9.58	259.35	3.48	1.48	1.48	1.89
	Sotalol	9.44	272.38	0.24	-1.76	-1.76	-1.22
	Salbutamol	9.27	239.31	0.64	-1.36	-1.36	-0.65
	Pindolol	9.26	248.32	1.75	-0.25	-0.25	0.47
	Atenolol	9.43	266.34	0.16	-1.84	-1.84	-1.29
	Metoprolol	9.49	267.37	1.88	-0.12	-0.12	0.38
	Clenbuterol	9.29	277.19	2	0	0	0.69

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Development of a predictive model

D. J. de Ridder et al.

Table 2. Properties freshly regenerated NORIT GAC 830 P (van Betuw et al., 2007).

Parameter	Unit	Value
Activation method	–	Steam
Iodine number	–	1050
Methylene blue adsorption	g/g	19
Total surface area (BET)	m ² /g	1150
Apparent density	kg/m ³	480

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Development of a predictive model

D. J. de Ridder et al.

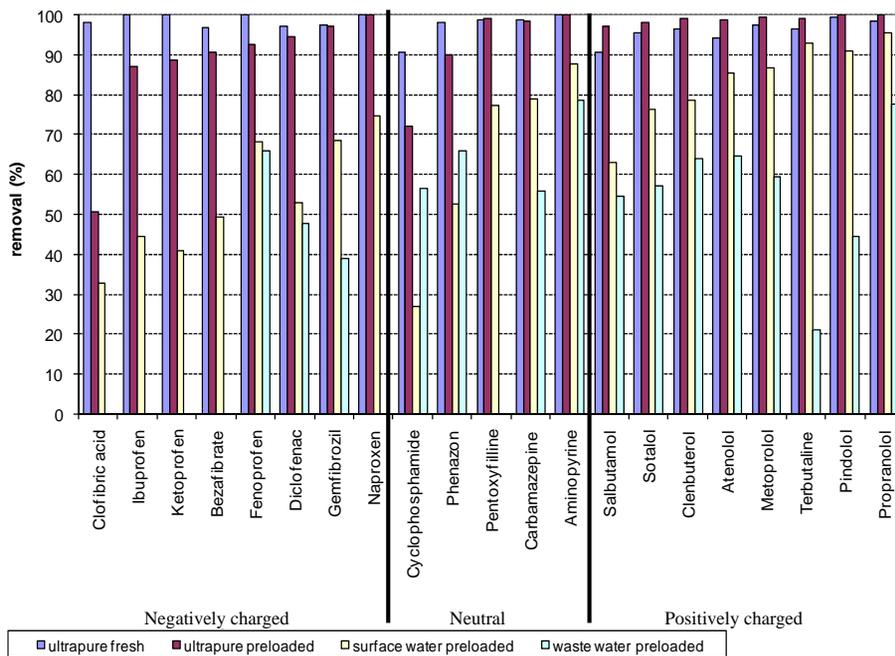


Fig. 1. Solute removal at a carbon dose of 50 mg.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc


Printer-friendly Version

Interactive Discussion



Development of a predictive model

D. J. de Ridder et al.

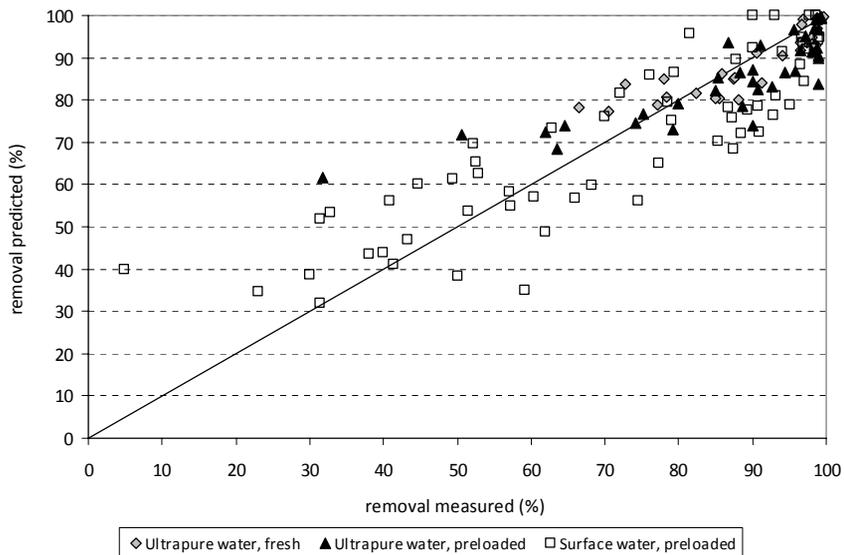

Ultrapure water, fresh carbon	ultrapure water, preloaded carbon	surface water, preloaded carbon
$R^2=0.74$; $Q^2_{loo}=0.66$	$R^2=0.64$; $Q^2_{loo}=0.54$	$R^2=0.74$; $Q^2_{loo}=0.71$

Fig. 2a. Model performance for the training set.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



