

This discussion paper is/has been under review for the journal Drinking Water Engineering and Science (DWES). Please refer to the corresponding final paper in DWES if available.

Effect of biostimulation on biodegradation of dissolved organic carbon in biological granular activated carbon filters

K. Tihomirova, A. Briedis, J. Rubulis, and T. Juhna

Department of Water Engineering and Technology, Riga Technical University,
Azenes street 16/20-263, 1048, Riga, Latvia

Received: 23 February 2012 – Accepted: 29 February 2012 – Published: 20 March 2012

Correspondence to: K. Tihomirova (kristina.tihomirova@rtu.lv)

Published by Copernicus Publications on behalf of the Delft University of Technology.

DWESD

5, 67–83, 2012

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

The addition of labile organic carbon (LOC) to enhance the biodegradation rate of dissolved organic carbon (DOC) in biological columns was studied. Acetate standard solution (NaAc) and LB (Luria Bertrani) medium were used as LOC as biostimulants in glass column system used for measurements of biodegradable dissolved organic carbon (BDOC). The addition of LOC related with the increase of total DOC in sample. The concentration of BDOC increased up to 7 and 5 times and was utilized after 24 min. contact time. The biodegradation rate constant was increased at least 8 times during adaptation-biostimulation period. There was a strong positive correlation between the biodegradation rate constant and the concentration of BDOC. Biostimulation period ranged from 24 to 53 h for NaAc biostimulant and from 20 to 168 h for LB. The study has shown that LOC could be used as stimulator to enhance the biodegradation rate of DOC during biofiltration.

1 Introduction

During ozonation dissolved organic carbon (DOC) is transformed to biodegradable organic carbon (BDOC), which then is metabolized by bacteria in the biofilter (Fahmi et al., 2003; Hammes and Vital, 2008; Volk et al., 1993). The amount of BDOC fraction depends on the type of natural organic matter (NOM) present in the water (Huck, 1990; Kaplan et al., 1994). The NOM compounds have different biodegradation kinetics: (i) fast biodegradable, (ii) more resistant to biodegradation or slow biodegradable and (iii) not biodegradable (Carlson and Amy, 2001; Klevens et al., 1996; Yavich et al., 2004). About 30 % of DOC is usually removed after biofiltration (Volk et al., 2002). In Boreal regions, where the surface waters contain high concentrations of NOM or organic matter substances having a low biodegradation rate and biofilters are operated at low temperatures, NOM removal in biofilter is not effective, only 15–19 % (Tihomirova, 2011). Biofilters are usually designed for empty bed contact time (EBCT) of less than

DWESD

5, 67–83, 2012

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



30 min. The slow biodegradable part of BDOC which is not removed in the biofilter will enter the distribution network and will be used as a substrate for bacteria (Eikebrokk et al., 2007; Tihomirova, 2011). To increase the biodegradation rate for removal of recalcitrant organic substances the addition of labile organic carbon (LOC) is a widely used practice for the remediation of contaminated soils, sediments and sewage (Brand et al., 2003; Shimp and Pfaender, 1985; Spain et al., 1980; Wiggins and Alexander, 1988), however applicability of this approach for the removal of compounds resistant to biodegradation from drinking water during biofiltration has not yet been studied.

The aim of this paper was to evaluate the effect of addition of LOC in water to enhance the biodegradation rate of DOC during biofiltration.

The study was carried out in a laboratory scale using treated humic rich water.

2 Materials and methods

2.1 Glassware

All glassware used in these experiments were cleaned thoroughly with a 10 % solution of potassium dichromate in concentrated sulfuric acid and rinsed with ultra pure water (Elga PureLab Ultra, Veolia Water Ltd., UK), dried and covered with aluminum septum heated for 6 h at +250 °C in order to avoid organic carbon release (van der Kooij et al., 1982).

2.2 Reagents

Acetate standard solution (NaAc), γ (DOC) = 1 g l⁻¹, was made in a 1000 ml volumetric flask where 5.6648 g of sodium acetate trihydrate (CH₃COONa · 3H₂O, Ultra, ≥99.5 %, Fluka, Germany) was dissolved and made up to volume with water. The solution is stable at 4 °C for about 6 months.

Luria Bertani (LB) medium solution, γ (DOC) = 7.5 g l⁻¹, was made in a 1000 ml volumetric flask where LB medium contains 10 g Peptone, 5 g Yeast extract, 10 g NaCl in

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



1000 ml sterile ultra pure water. Both mentioned solutions were used as LOC for the biostimulation experiments.

To avoid nutrient limitation all samples (100 ml) were supplemented with 100 μ l solution of inorganic nutrients. The solution was prepared by dissolving 4.55 g $(\text{NH}_4)_2\text{SO}_4$, 0.2 g KH_2PO_4 , 0.1 g $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$, 0.1 g $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ and 0.2 g NaCl in sterile ultra pure water (1000 ml) (Miettinen et al., 1999).

2.3 DOC determination

The concentrations of DOC were measured with a TOC-5000A Analyzer (Shimadzu Corporation, Kyoto, Japan) according to European Standard EN 1484:1997. The 0.45 μ m pore size membrane filters (Millipore Corporation, USA or Sartorius AG, Germany) used for DOC measurements were carefully rinsed, first with ultra pure water and then with the water sample. The blank and control solution were analyzed with each series of DOC sample in order to verify the accuracy of the results obtained by the method. Every DOC sample was tested in duplicate and the mean values were calculated ($\text{CV} \leq 2\%$).

2.4 Experimental design and sampling procedure

All water samples (2000 ml) from biologically activated carbon (BAC) filtration were collected in glass bottles completely filled with the sample and subsamples (50 ml) from glass column system were collected in sterile glass bottles and stored in a refrigerator at temperature in the range of 2 to 5 $^\circ\text{C}$, before the analyses were done.

To evaluate the effect of addition of LOC on biodegradation the BDOC experimental set-up contains several chromatography glass columns with different height (H , from 5 to 25 cm) (Chromaflex, USA) coupled in-series system (Fig. 1), which was filled with glass carrier beads ($\text{O} = 6$ mm, specific surface area = $3.76 \text{ cm}^2 \text{ g}^{-1}$) as a support media for bacteria (Eikebrokk et al., 2007; Eikebrokk, 2009) was used.

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The EBCTs in system was 272 min. The samples were continuously pumped upward the columns using a peristaltic pump (Masterflex L/S, Cole-Parmer, USA). An optimal flow rate of 2–5 ml min⁻¹ was used. The biodegradation kinetics of the sample was measured using the intermediate samples (i.e. EBCTs with 8 min intervals).

The biomass in all the columns was kept constant by the homogenization after each experiment. The glass beads were removed from the columns and homogenized by shaking for 24 h and reused after. The biomass concentration in all columns was 5.23×10^{11} cell cm⁻² recalculated from adenosine 5-triphosphate (ATP) measurements.

2.5 Determination of biomass concentration

The concentration of biomass in the column system was measured as the concentration of ATP. The total ATP concentration was determined as described by Berney et al. (2006) using the Promega Bac Titer-Glo Microbial Cell Viability Assay (Promega Corporation, USA) and the calculations were based on the standard curve made with known ATP standard dilutions (Promega Corporation, USA) in sterile ultra pure water. The measurements of ATP were made in the solution obtained from 5 g of glass beads from each column collected in a sterile plastic tube filled with 25 µl ultra pure water and treated by sonification for 2 min with 40 % amplitude (Ultra Sonic processor, Cole Parmer, USA) and in the effluent water after each column during the sampling process for DOC samples. The bacterial ATP was calculated by subtracting the extracellular ATP from the total ATP (Hammes and Vital, 2008). The luminescence was measured as an integral over 10 s in relative light units (RLU) using a luminometer (Hygiene International, Pi-102, Germany). All the samples were measured in triplicate.

2.6 Calculations

The *k* degradation rate was obtained by fitting the experimental data to the exponential function and expressed as first order kinetic constant (min⁻¹). The equation was fitted

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



separately to data for period in which the minimum concentration of DOC or maximum concentration of BDOC was reached. The regression coefficients (R_2) for exponential curve and Pearson criteria (P) were used (Microsoft Office Excel, 2003). To compare the degradation rate values of statistically significant assays the Moment correlation coefficient (r) was used (Fower et al., 1998).

3 Results

To stimulate biodegradation rate of slowly degradable part of DOC in drinking water treatment the effect of addition of LOC (NaAc or LB) in water was tested in the glass column system.

The concentration of BDOC of water sample without addition of LOC was only 0.49 mg l^{-1} or 7% in this study. The degradation rates of BDOC in BAC water samples with NaAc and LB as biostimulants were higher (about 1.57×10^{-2} and $2.57 \times 10^{-2} \text{ min}^{-1}$, respectively), whereas the degradation rate in the sample without biostimulant was one order of magnitude lower ($0.10 \times 10^{-2} \text{ min}^{-1}$), see Fig. 2. The biodegradation rates k in the samples with NaAc and LB as biostimulant were up to 12 times higher compared with the BAC sample without biostimulant.

The concentrations of BDOC were calculated as the difference in concentration of DOC between the inlet water sample in glass column system before addition of LOC and the effluent water sample with lowest concentration of DOC, namely DOC_{BAC} and DOC_{min} (Fig. 3). The total concentration of BDOC which accounts for both parts – quantity of sample and LOC was not considered in this paper since it was not comparable with measurements of BDOC in water treatment plant (WTP). The initial concentration of substrate in the BAC sample (DOC_{BAC}) for the series of experiments with NaAc and LB was 5.87 ± 0.96 ($n = 9$) and 4.73 ± 0.19 ($n = 7$) mg l^{-1} , accordingly. The concentration of dose of biostimulant (DOC_{LOC}) of NaAc and LB was 1.81 ± 0.36 ($n = 9$) and 1.25 ± 0.25 ($n = 7$) mg l^{-1} , respectively.

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The period of biodegradation time when BDOC_{BAC} was $<15\%$ in each water sample supplemented with LOC can be named an adaptation period of biomass (Tihomirova et al., 2012). During the adaptation period a decrease of minimal EBCT was observed (Table 1). The results showed that during the experiment the biodegradation rate constant using biostimulants NaAc and LB increased up to 22 and 8 times, respectively, and this time interval can be called the biostimulation period. The maximum concentration of BDOC and the maximum biodegradation rate was reached after 51 and 48 h feeding with NaAc and LB, respectively (Table 1). The biostimulation period with NaAc was accomplished after 53 h, after which both BDOC_{BAC} and biodegradation rate decreased. In water samples supplemented with LB the biostimulation period was accomplished after 168 h. The removal efficiency of BDOC reached up to 49% and 37% at maximal biodegradation rate with both NaAc and LB, respectively which is significantly higher result compared with sample after BAC filters (Fig. 2). There was a strong positive correlation between biodegradation rate constant and concentration of BDOC ($r = 0.63$ for NaAc; $r = 0.65$ for LB; $P = 0.6$ for both biostimulants). The biodegradation process can be divided in two periods – adaptation or coadaptation (20–24 h with biostimulants in this study) and biostimulation period, which was limited from 24 to 53 h for NaAc and from 20 to 168 h for LB biostimulant.

The experiments with BAC samples and NaAc and LB biostimulants showed that after the adaptation phase the fast degradable part increased to 28.9 and 29.3% of DOC, the slowly degradable increased to 20.9 and 10.7% and the non-degradable part decreased to 50.2 and 60%, respectively (data not shown). The BDOC was 50 and 40% of $\text{DOC}_{\text{total}}$, respectively.

4 Discussions

The experiments were done using water samples taken after passing through BAC filters from the surface WTP in Riga, Latvia. The raw water in River Daugava contains $15.34 \pm 3.84 \text{ mg l}^{-1}$ of DOC and is treated conventionally by coagulation-sedimentation

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and filtration in rapid sand filters. Then the water is ozonated and filtrated through the BAC filters. Water after biofilter contains $5.33 \pm 1.45 \text{ mg l}^{-1}$ of DOC (Tihomirova et al., 2010). Biostimulation approach was based on the hypothesis that the biodegradability in water samples is higher than the average concentration of BDOC ($0.82 \pm 0.38 \text{ mg l}^{-1}$ or 15 %) measured in WTP in the effluent from BAC filters in the monitoring period examined previously (Tihomirova et al., 2010).

The addition of LOC was related to time of adaptation of biomass in glass column system which for NaAc and LB biostimulants was 24 and 20 h, respectively (Table 1) (Tihomirova et al., 2012), the time interval during which the BDOC value was negligible or biodegradation is not detected (Wiggins and Alexander, 1988). As shown previously (Yavich et al., 2004), the addition of a small amount of biostimulant resulted in an increase in BDOC concentration and a sharper decrease in “fast” BDOC.

As shown in this study for samples taken at Daugava WTP the biodegradation rate k of samples containing NaAc and LB as biostimulants increased up to 12 times compared with the BAC sample without biostimulant. Thus the biodegradation rates can be enhanced by using biostimulants.

Further feeding of sample and LOC lead to habitation of biomass to substrate and decrease of biodegradation rate constant. This process was accompanied by increased cell concentration in the effluent water. These results showed that bacterial release into the effluent sample may be due to substrate concentration limitation after biodegradation.

Some organic compounds, especially aromatic compounds are rather resistant to natural biodegradation and biodegradation of a compound of the mixture can be strongly influenced by the presence of other components in the mixture (Tsai and Juang, 2006). It has been shown previously that the addition of LOC results in an increase of the concentration of easy degradable part of mixture and the stimulated biodegradation results in decrease in minimum EBCT compared to that without biostimulation (Spain et al., 1980; Yavich et al., 2004). The biodegradable DOC was utilized after short contact time or at the top of the biofilter (Moll et al., 1998). The rate of

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

biodegradation is highly variable and depends on many parameters including chemical structure and concentration of the organic substance in water samples, applied oxidant (ozone, chlorine) dose, temperature, salinity, pH, concentration of oxygen, and inorganic nutrients and concentration of active microorganisms (Becker et al., 2006; Brand et al., 2003, 2004; Kulp et al., 2007; Sanchez et al., 2007; Spain et al., 1980; Spain and Veld, 1983; Steiner and Sauer, 2001; Swindoll et al., 1988).

Direct addition of a nutrient can stimulate the activity of microbial communities (Macbeth et al., 2004) and the presence of easy degradable carbon sources can enhance the biodegradation of more persistent compounds (Brand et al., 2003; Shimp and Pfaender, 1985). Method of co-adaptation and its impact on the biodegradation of different chemicals has been used to degrade resistant chemical pollutions in different environmental settings (Schmidt and Alexander, 1985; Shimp and Pfaender, 1987; Wiggins and Alexander, 1988).

This study showed that biodegradation of slowly degradable part of dissolved organic compounds can be enhanced by biostimulation with LOC doses and thus the biofiltration systems of the WTPs in Boreal regions treating humic rich water can be improved. LOC addition stimulated biodegradation rate of slowly biodegradable organic matter. The biomass consumed easy degradable substrate and the adaptation period contributed to that slowly degradable organic matter was used faster as a secondary substrate. From the results it can be concluded that LOC can be used as a stimulator of biodegradation which would allow to effective remove of slowly degradable organic matter within EBCT which is usually about 30 min. The biostimulation period is the period limited in time when BDOC and the biodegradation rate constant substantially increase.

5 Conclusions

From the obtained results it can be concluded that:

- The addition of LOC was related to the increase of the total DOC. At the same time

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



**Effect of
biostimulation on
biodegradation of
DOC**

K. Tihomirova et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

BDOC concentration increased significantly (up to 7 and 5 times higher with NaAc and LB as biostimulants, respectively) and it was utilized after 24 min contact time due to biostimulation.

- The study demonstrates that biodegradation rates can be increased by using a biostimulant. The degradation rates of BDOC in BAC water samples with NaAc and LB as biostimulants were 1.57×10^{-2} and $2.57 \times 10^{-2} \text{ min}^{-1}$ whereas the degradation rate in the sample without biostimulant was $0.10 \times 10^{-2} \text{ min}^{-1}$.
- There was a strong positive correlation between the constant of biodegradation rate and concentration of BDOC ($r = 0.63$ for NaAc; $r = 0.65$ for LB; $P = 0.6$ for both biostimulants).
- The adaptation time for the mixture of sample and biostimulant was 20 and 24 h for LB and NaAc, respectively.
- The biostimulation period for NaAc and LB biostimulants was from 24 to 53 h, and from 20 to 168 h, respectively.
- The biostimulation period was accomplished with increasing EBCT, decreasing BDOC and biomass detachment.

Acknowledgements. This work has been partly supported by the European Social Fund within the National Programme “Support for the carrying out doctoral study program’s and post-doctoral researches” project “Support for the development of doctoral studies at Riga Technical University”. This work has been undertaken as a part of the research project “Technology enabled universal access to safe water – TECHNEAU” (Nr. 018320) which is supported by the European Union within the 6th Framework Programme. There hereby follows a disclaimer stating that the authors are solely responsible for the work. It does not represent the opinion of the Community and the Community is not responsible for any use that might be made of data appearing herein.

References

- Becker, J. G., Berardesco, G., Rittmann, B. E., and Stahl, D. A.: Effects of endogenous substrate on adaptation of anaerobic microbial communities to 3-Chlorobenzoate, *Appl. Environ. Microbiol.*, 72, 449–456, 2006.
- 5 Berney, M., Weilenmann, H. U., and Egli, T.: Flow-cytometric study of vital cellular functions in *Escherichia coli* during solar disinfection (SODIS), *Microbiology*, 152, 1719–1729, 2006.
- Brandt, B. W., Van Leeuwen, I. M. M., and Kooijman, S. A. L. M.: A general model for multiple substrate biodegradation. Application to co-metabolism of structurally non-analogous compounds, *Water Res.*, 37, 4843–4854, 2003.
- 10 Brandt, B. W., Kelpin, F. D. L., Van Leeuwen, I. M. M., and Kooijman, S. A. L. M.: Modeling microbial adaptation to changing availability of substrates, *Water Res.*, 38, 1003–1013, 2004.
- Carlson, K. H. and Amy, G. L. Ozone and biofiltration for multiple objectives, *J. Am. Water Works Assoc.*, 93, 88–98, 2001.
- 15 Eikebrokk, B.: Drinking Water from Source to Tap – State of the art and perspectives, edited by: Van Hoven, T. and Katzner, C., IWA Publishing, London, UK, ISBN 1843392755, ISBN 13:9781843392750, 265–280, 2009.
- Eikebrokk, B., Juhna, T., Melin, E., and Osterhus, S. W.: Deliverable 5.3.2a. Water Treatment by Enhanced Coagulation and Ozonation-Biofiltration. Intermediate report on operation optimization procedures and trials. Report of Integrated Project TECHNEAU Funded by the European Commission under the Sustainable Development, Global Change and Ecosystems Thematic Priority Area, <http://www.techneau.org/index.php?id=120>, last access: 12 August 2009, 2007.
- 20 European Standard EN 1484:1997: Water analysis – Guidelines for the determination of total organic carbon (TOC) and dissolved organic carbon (DOC), 1997.
- 25 Fahmi, Nishijima, W., and Okada, O.: Improvement of DOC removal by multi-stage AOP-biological treatment, *Chemosphere*, 50, 1043–1048, 2003.
- Fower, J., Cohen, L., and Jarvis, P.: *Practical Statistics for field biology*, 1st Edn., John Wiley & Sons Inc, USA, 1998.
- 30 Hammes, F. and Vital, M.: Deliverable 3.3.9. A Report on the Growth of Pathogenic Bacteria on Natural Assimilable Organic Carbon. Report of Integrated Project TECHNEAU Funded by the European Commission under the Sustainable Development, Global Change and

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

Ecosystems Thematic Priority Area, <http://www.techneau.org/index.php?id=120>, last access: 17 August 2009, 2008.

Huck, P. M.: Measurement of biodegradable organic matter and bacterial growth in drinking water, *J. Am. Water Works Assoc.*, 82, 121–132, 1990.

5 Kaplan, L. A., Reasoner, D. J., and Rice, E. W.: A survey of BOM in United-States drinking waters, *J. Am. Water Works Assoc.*, 86, 78–86, 1994.

Klevens, C. M., Collins, M. R., Negm, R., and Farrar M. F.: Characterization of NOM removal by biological activated carbon, in: *Advances in Slow Sand and Alternative Biological Filtration*, edited by: Graham, N. and Collins, R., John Wiley & Sons, 79–87, 1996.

10 Kulp, T. R., Han, S., Saltikow, C. W., Lanoil, B. D., Zargar, K., and Oremland, R. S.: Effect of imposed salinity gradients on dissimilatory arsenate reduction, sulphate reduction, and other microbial processes in sediments from two California soda lakes, *Appl. Environ. Microbiol.*, 73, 5130–5137, 2007.

15 Macbeth, T. W., Cummings, D. E., Spring, S., Petzke, L. M., and Sorenson, K. S.: Molecular characterization of a dechlorinating community resulting from in situ biostimulation in trichloroethene-contaminated deep, fractured basalt aquifer and comparison to a derivative laboratory culture, *Appl. Environ. Microbiol.*, 70, 7329–7341, 2004.

Miettinen, I. T., Vartiainen, T. K., and Martikainen, P. J.: Determination of assimilable organic carbon (AOC) in humus-rich waters, *Water Res.*, 33, 2277–2282, 1999.

20 Moll, D. M., Summers, R. S., and Breen, N.: Microbial characterization of biological filters used for drinking water treatment, *Appl. Environ. Microbiol.*, 64, 2755–2759, 1998.

Sanchez, B., Champomier-Verges, M.-C., Collado, C., Anglade, P., Baraige, F., Sanz, Y., De Los Reyes-Gavilan, C. G., Margolles, A., and Zagorec, M.: Low-pH adaptation and the acid tolerance response of *Bifidobacterium longum* biotype *longum*, *Appl. Environ. Microbiol.*, 73, 6450–6459, 2007.

25 Schmidt, S. K. and Alexander, M.: Effect of dissolved organic carbon and second substrates on the biodegradation of organic compounds at low concentrations, *Appl. Environ. Microbiol.*, 49, 822–827, 1985.

30 Shimp, R. J. and Pfaender, F. K.: Effect of adaptation to phenol on biodegradation of monosubstituted phenols by aquatic microbial communities, *Appl. Environ. Microbiol.*, 53, 1496–1499, 1987.

Spain, J. C. and Veld, P. A. V.: Adaptation of natural microbial communities to degradation of xenobiotic compounds: effects of concentration, exposure time, inoculum, and chemical

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

- structure, *Appl. Environ. Microbiol.*, 45, 428–435, 1983.
- Spain, J. C., Pritchard, P. H., and Bourguin, A. W.: Effect of adaptation on biodegradation rates in sediments/water cores from Estuarine and freshwater environments, *Appl. Environ. Microbiol.*, 40, 726–734, 1980.
- 5 Steiner, P. and Sauer, U.: Proteins induced during adaptation of *Acetobacter acetii* to high acetate concentrations, *Appl. Environ. Microbiol.*, 67, 5474–5481, 2001.
- Swindoll, C. M., Aelion, C. M., and Pfaender, F. K.: Influence of inorganic and organic nutrients on aerobic biodegradation and adaptation response of subsurface microbial communities, *Appl. Environ. Microbiol.*, 54, 212–217, 1988.
- 10 Tihomirova, K.: NOM Removal from Water and its Influence on the Drinking Water Quality: Natural organic matter removal from water and its influence on the water quality in distribution network, LAP LAMBERT Academic Publishing, ISBN 978-3-8465-2340-7, 172 pp., 2011.
- Tihomirova, K., Rubulis, J., and Juhna, T.: Changes of NOM Fractions during conventional drinking water treatment process in Riga, Latvia, *Water Sci. Technol.*, 10, 157–163, doi:10.2166/ws.2010.652, 2010.
- 15 Tihomirova, K., Briedis, A., Rubulis, J., and Juhna, T.: Effect of biomass adaptation to biodegradation of dissolved organic carbon in water, *Biodegradation*, doi:10.1007/s10532-011-9511-z, in press, 2012.
- Tsai, S.-Y. and Juang, R.-S.: Biodegradation of phenol and sodium salicylate mixtures by suspended *Pseudomonas putida* CCRC 14365, *J. Hazard. Mater.*, 138, 125–132, 2006.
- 20 Van der Kooij, D., Visser, A., and Hijnen, W. A. M.: Determination the concentration of easily assimilable organic carbon in drinking water, *J. Am. Water Works Assoc.*, 74, 540–545, 1982.
- Volk, L., Renner, C., Roche, P., Paillard, H., and Joret, J. C.: Effects of ozone on the production of biodegradable dissolved organic carbon (BDOC) during water treatment, *Ozone-Sci. Eng.*, 25, 389–404, 1993.
- Volk, C., Wood, L., Johnson, B., Robinson, J., and Kaplan, L.: Monitoring dissolved organic carbon in surface and drinking water, *J. Environ. Monit.*, 4, 43–47, 2002.
- Wiggins, A. B. and Alexander, M.: Role of chemical concentration and second carbon sources in acclimation of microbial communities for biodegradation, *Appl. Environ. Microbiol.*, 54, 2803–2807, 1988.
- 30 Yavich, A. A., Lee, K.-H., Chen, K.-C., Pape, L., and Masten, S. J.: Evaluation of biodegradability of NOM after ozonation, *Water Res.*, 38, 2839–2846, 2004.

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

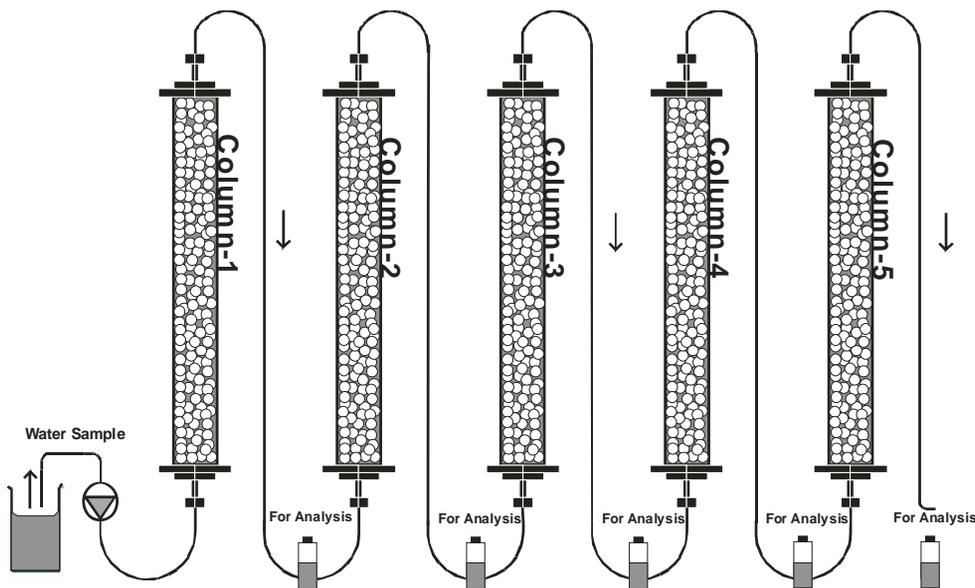


Fig. 1. BDOC experimental set-up (adapted from Tihomirova, 2011).

Effect of biostimulation on biodegradation of DOC

K. Tihomirova et al.

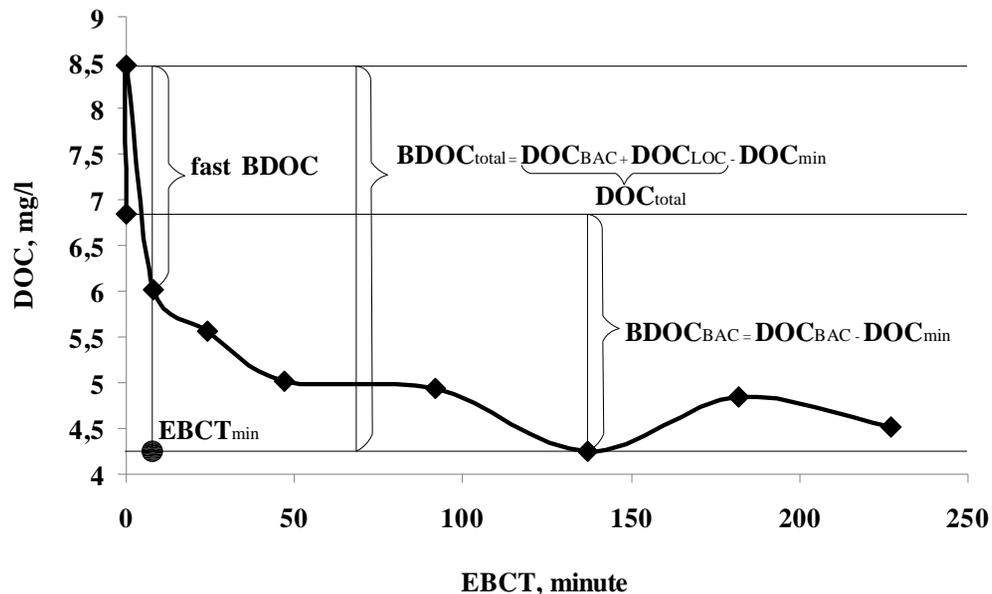


Fig. 3. The principle of BDOC quantification shown on an example of 30 h feeding of BAC water sample supplemented with NaAc as a biostimulant.

Discussion Paper | Discussion Paper | Discussion Paper | Discussion Paper | Discussion Paper

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion